

# Installation Instructions for ALLORA USA Undercounter Sink

To ensure this product is installed properly, please read these instructions carefully before you begin. ALLORA USA recommends that all products should be installed by a professional experienced installer.

ALLORA USA is not responsible for any damages due to improper installed. Also be sure your installation conforms to local codes.

Before installing the sink, inspect it for damage. DO NOT install a damaged unit. Notify your ALLORA USA distributor of any damage. Replace sink its original packing.

## Recommended Tools & Materials



Putty Knife




Adjustable Wrench



Plumbers' Putty



Channel Lock Pliers




Silicone Adhesive




Tape Measure



Pipe Wrench



Basin Wrench




Tubing Cutter




Phillips Screwdriver



Regular Screwdriver



Hacksaw




Drill




Saber Saw

**NOTE:** More specialized tools may be necessary to install this sink to countertop materials other than wood or wood composites.

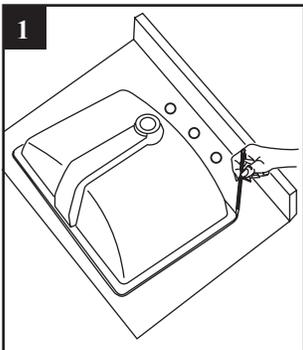

1

**NOTE:** To avoid damage to countertop, install sink such that future removal from underneath the countertop is possible. First, make sure the clearance between the backsplash, faucet, fixtures and cabinets are acceptable for the new sink.




2

Perimeter of Sink

Cutout

Carefully cut out the enclosed template, then position and trace the template on the countertop as shown on the template. Make a mark of the faucet hole centerline on the countertop. Drill a 1/2" pilot hole on the inside of the cut line. Use a saber saw or a keyhole saw to cut out the countertop opening.


## 3 FOR WOOD COUNTERTOP



Drill 1/8 dia. X 3/8 deep

Mark and pre-drill the wood screw holes as located on the enclosed template. Waterproof any exposed areas of wood.


## 4 FOR MARBLE OR SOLID SURFACE COUNTERTOP




Brass insert, epoxy in place with threaded end exposed. (Epoxy not supplied).

To protect countertop, place it on a foam padding and drill 3/8 Dia. X 1/2 deep hole as per location shown on template.


# Installation Instructions for ALLORA USA Undercounter Sink




Mount the drain assembly (not included) on the sink, following faucet manufacturer's instructions. Be certain to apply a bead of sealing putty on the underside of the drain (Part "A") in order to ensure a watertight seal between the sink and drain. Remove excess putty after installing drain on sink.




**NOTE:** Do not use adhesives or adhesive sealants. After checking fit and alignment of sink to cut out, apply a bead of silicone adhesive to rim of sink.

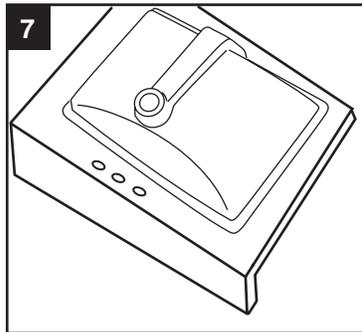


Center bowl over cutout and tighten screws (see 3 or 4) to secure bowl to countertop. Remove excess sealant from inside lip.  
**NOTE:** The screws provided should be used on countertops with a minimum 1" thickness. For thinner countertops, use appropriate anchors and fasteners.

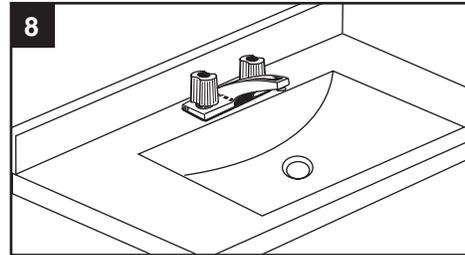

Install faucet (not included) and countertop (not included) following manufacturers instructions.

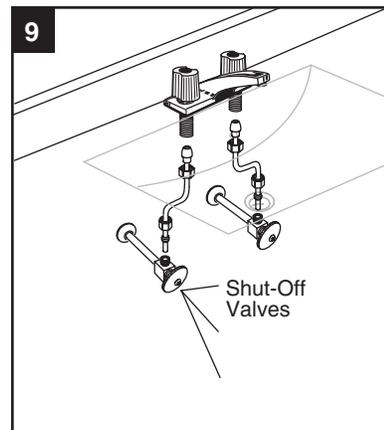

Connect supply line to faucet (finger tight) and carefully bend tubes to engage with the supply shut-off valves. Tighten connections at faucet and shut-off valves for water tight seal.

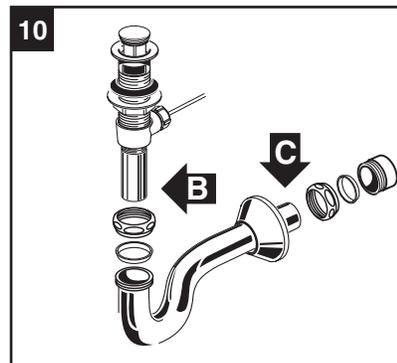

Connect trap to drain assembly hand tight to check alignment. It may be necessary to cut off part of the tailpiece (area "B") or part of the horizontal leg of the trap (area "C"). Secure joints for watertight assembly.

ALLORA USA  
22713 COMMERCE CENTER COURT STE 140  
DULLES, VA 20166  
571-291-3484  
WWW.ALLORAUSA.COM